

RiMO

the difference



EV05

Safety | Quality | Design

name: RIMO - EVO5
„GS-Approved Security“ certificate
by Technical Inspection Authority
(TÜV Rheinland)

Charakter: aggressive-sporty, dynamic,
safety, perfect

frame: 31,8 mm frame made with
special alloy and heat-treated
for strength and longevity

drive shaft: 30 mm rear axle with 3 bearing
 housings for easy mounting
 of rear axle

brakes: mechanical break with double-
safety pulley system or hydraulic
(optional) both adjustable

drive: drivebelt

engine: Honda GX 200 4.8 KW (6.5 HP)
Honda GX 200 6.25 KW (8.5 HP)
Honda GX 270 6.6 KW (9.0 HP)

weight: 108 kg (evo5 Standard)


l/w/h: 1880 mm / 1300 mm / 600 mm

feature: low maintenance, high efficiency
low operating costs




**Made
in Germany**

geprüfte Sicherheit - Made in Germany

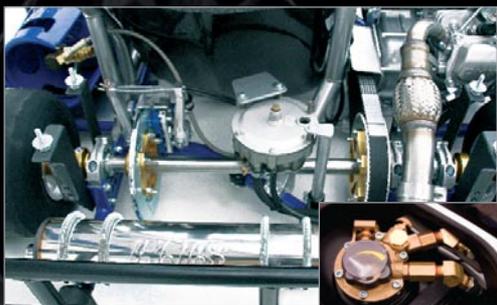

gas re-equipment



unrotatable silent block carrier



weight adjusting system 30 kg (optional)



TÜV approved and certified safety



steering arm made of high-grade alloy steel



hydraulic 2-circuit-break



alloy spacers for vertical adjustment of chassis (± 13 mm)



premium wheel



rollbar with head-rest and safety seat belt



clamp bearing



rear axle with 3 bearing housings (optional)



quick release fastener (und detachable)



symbols for assurance and RIMO „deformable zone“



brake disc protection



steering column connection



ergonomically positioned steering wheel



RiMO
the difference

height adjustable chassis with alloy spacers (± 13 mm)

hydraulic 2-circuite-brake (optional)

CrMo-double tube surroundbumper fixed on rubber donuts all around

front rubber bumper (option)

pedal extention (option)

improved control arm (spindle) with reinforced inner-bearing. Height adjustable (individual for every track) for amount of grip

special, adjustable upper bearing for steering shaft

chassis-identification number

reinforced side wings

DUNLOP tires on single part aluminum wheels (other types possible)

plastic bound to supply the standard bumper (option)

gas cable protection

ergonomically positioned steering wheel

chain/drive-belt cover in aluminium

individual bodyworkdesign (option)

extra surround protection tube for engine

fuel tank - side mounted, extra protection for tank

Honda engine, series GX

weight adjusting system max. 30kg (option)

cover for engine and gear box

RIMO premium wheel

new special bearings for rear axle (option)

centrally arranged steering posts in front of seat

gas cap integrated fuel level control

adjustable seat (max. 80 mm) 4-point elastically supported

brake disc protection (option), 2-piston hydraulic brake, self adjustable (option), brake pad quick release

unrotatable silent block carrier

rollbar with head-rest and safety seat belt

high-performance-catalytic-converter (HJS)

axle-cover with 4 undetachable quick release fastener

extra surround protection tube for axle cover, converter and rear wheels

RiMO
the difference